



DUNE 600x600 mm EZI Grip

EZIGRIPTM
Smooth When Dry Grip When Wet

JURA

Porcelain Tile

A NATURAL MIXTURE OF
LIMESTONE AND
QUARTZITE IN AN ELEGANT
AND MODERN STYLE.



EZIGRIP™
Smooth When Dry Grip When Wet


The remarkable EZIGrip tile surface possesses a true Non-Slip property when wet, without compromising the soft, easy, and smooth texture in appearance, touch, and feel when dry. The transformative functionality of these tiles facilitates seamless transitions between multiple areas, making them easy to maintain in the long term and simplifying the selection process with confidence.

It is Easy, It is safe – It is EZIGrip.





SUNRISE

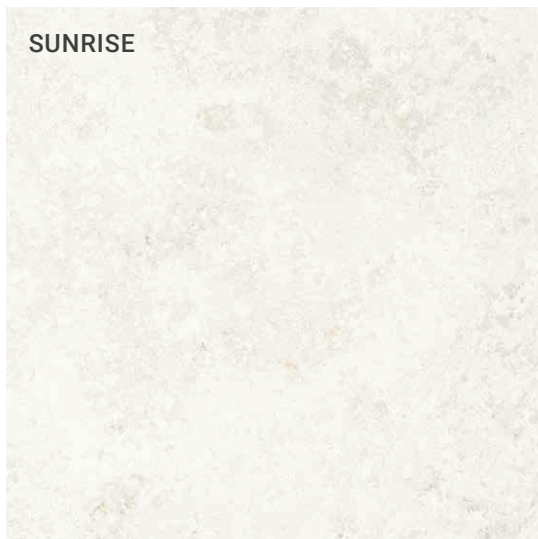


600x600x10mm


DUNE



600x600x10mm

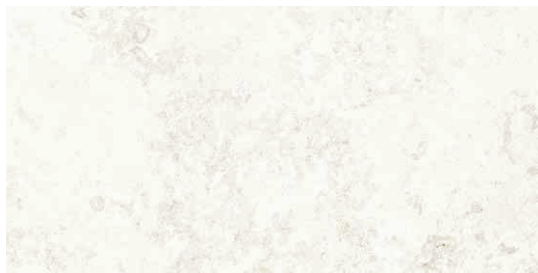

600x300x10mm

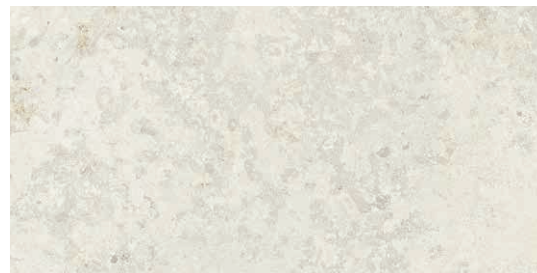

600x300x10mm

Name	Product Code	Nominal Size	Finish	Faces	Pc/Box
Jura Sunrise	GP-JU-SRE6030E	600x300	EZIGrip (P4)	18	8
Jura Sunrise	GP-JU-SRE6060E	600x600	EZIGrip (P4)	9	4
Jura Dune	GP-JU-DUN6030E	600x300	EZIGrip (P4)	18	8
Jura Dune	GP-JU-DUN6060E	600x600	EZIGrip (P4)	9	4

TECHNICAL SPECIFICATIONS				RECOMMENDED APPLICATIONS				
	Water Absorption (ISO10545-3)	≤ 0.5% (Result 0.06%)		Chemical Resistance (ISO10545-13)	PASS (A–LA–HA)	Exterior Wall		
	Breaking Strength (ISO10545-4)	PASS ≥ 1300 N		Stain Resistance (ISO10545-14)	PASS	Interior Wall		
	Modulus of Rupture (ISO10545-4)	PASS ≥ 35 N/MM²		Slip Resistance (AS/NZS 4586 Appendix A, D)		Residential Floor		
	Abrasion Resistance (ISO10545-7)	CLASS 4		Matt Finish		Commercial / External Floors #		
	Frost Resistance (ISO10545-12)	PASS		▪ Oil Ramp ▪ Wet pendulum	R11 P4		V3	

Subject to local slip resistance regulations for area of use or as recommended by Standard Australia guide HB 198:2014