SPC ECO FLOORING Hybrid rigid

SU EVERSTONE

SPC ECO FLOORING Hybrid rigid



Pebble Grey





Type: Hybrid Planks Size: 1524x183x6.5mm Package: 8 Planks, 2.2311m²/box Type: Hybrid Planks Size: 1524x183x6.5mm Package: 8 Planks, 2.2311m²/box

Orchid Ash




SPC ECO FLOORING Hybrid rigid

Stamford Oak



SPC ECO FLOORING Hybrid rigid

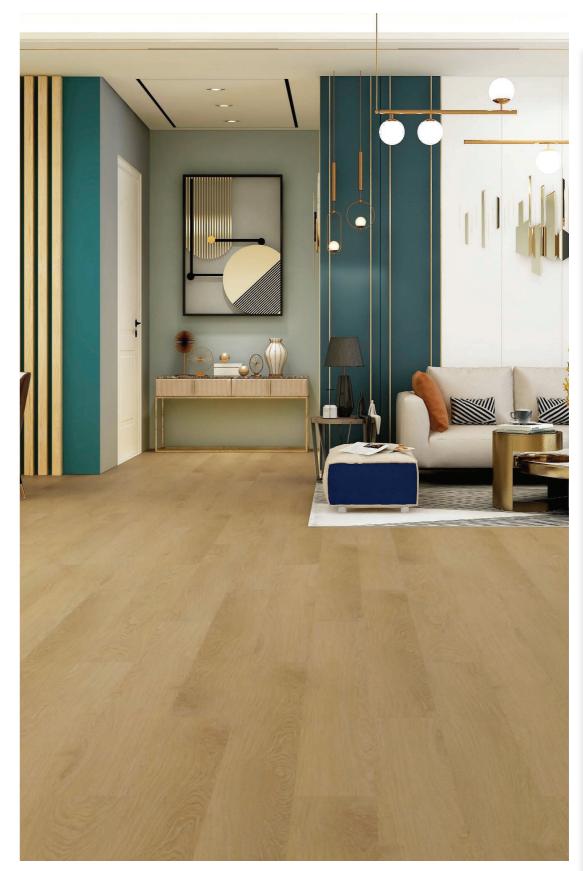

Type: Hybrid Planks Size: 1524x183x6.5mm Package: 8 Planks, 2.2311m²/box

1 giller

Type: Hybrid Planks Size: 1524x183x6.5mm Package: 8 Planks, 2.2311m²/box

Coastal Beige





Prague Oak



SPC ECO FLOORING Hybrid rigid



Type: Hybrid Planks Size: 1524x183x6.5mm Package: 8 Planks, 2.2311m²/box

1/2

Type: Hybrid Planks Size: 1524x183x6.5mm Package: 8 Planks, 2.2311m²/box

Moschino



Spotted Gum



SPC ECO Flooring HYBRID RIGID



Type: Hybrid Planks Size: 1524x183x6.5mm Package: 8 Planks, 2.2311m²/box

Type: Hybrid Planks Size: 1524x183x6.5mm Package: 8 Planks, 2.2311m²/box

Blackbutt



Jarrah



SPC ECO Flooring HYBRID RIGID




Type: Hybrid Planks Size: 1524x183x6.5mm Package: 8 Planks, 2.2311m²/box

Package: 8 Planks, 2.2311m²/box

Tasmanian Oak

SPC ECO **FLOORING HYBRID RIGID**

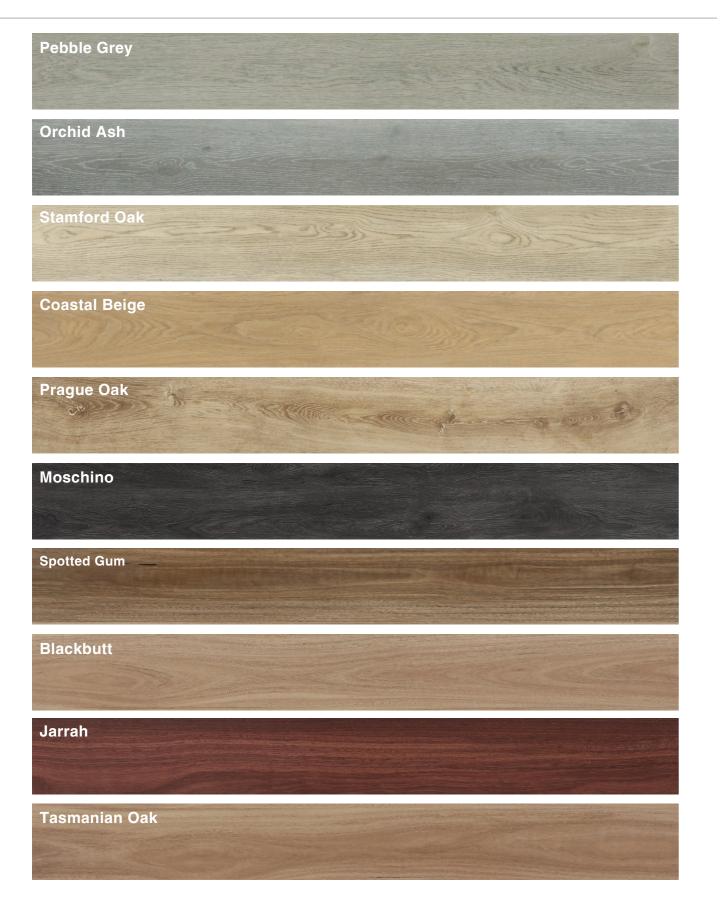

★ 6.5MM Nominal Size: 1524x183mm

SPC ECO FLOORING **TECHNICAL SPECIFICATIONS**

TYPE Hybrid Planks

DIMENSIONS 1524mmx183mmx6.5mm (5/0.5mm SPC + 1.5mm IXPE)

BOX CONTAINS $8 \text{ Planks} = 2.2311 \text{m}^2/\text{box}$

INSTALLATION METHOD Floating Floor (Licensed Click System)

SLIP RATING

AS4586 (2013) Slip Resistance Classification of New Pedestrian Surface Materials Appendix A - Wet Pendulum Test Achieved a pass of P4

VINYLWEAR LAYER

Hardened vinyl wear layer provides excellent resistance to scuffs and abrasions.

LUXURY RIGID CORE

100% phthalate-free extruded closed-cell core provides exceptional rigidity, dimensional stability and anti-tellegraphing performance.





FIRE RATING

Critical Heat/Radiant Flux (CHF) Pass the AS ISO 9239.1 Standard as required by the Australian National Construction Code

ACOUSTIC RATING

Achieved AAAC 5 Star Acoustic Rating

ENVIRONMENTAL & QUALITY CERTIFICATES

VOC E0 (Volatile Organic Compound) ISO9000 Quality Control System ISO14000 Environment Control System

STRUCTURAL WARRANTY

Life Time Structure Warranty

URETHANE WITH CERAMIC BEAD FINISH

UV cured urethane and ceramic bead top coating for enhanced durability, stain resistance, and easy care and maintenance.

HD DECORATIVE FILM

High definition film prints create vivid, natural wood, stone, and abstract looks.

CLICK LOCKING SYSTEM

Innovative locking system enables quick, easy, hassle-free installation.

QUIET INTEGRATED SOUND **REDUCTION UNDERLAYMENT**

Bonded cross-linked underlayment minimizes impact and transmitted sound, provides underfoot warmth and comfort and mitigates subfoor imperfections.











static



ance to cigarette butts

warm to the

SPC ECO Flooring **HYBRID RIGID**

Sample Boards





Pebble Grey







Jarrah

Tasmanian Oak



Stamford Oak



Spotted Gum



Blackbutt



Board Size: 540mm(W) x 750mm(H)

SPC ECO Flooring **HYBRID RIGID**

Compact design, showing large sample area per colour. Each sample board has all product information. Ideal as a "Silent salesperson".

Displays can be easily relocated throughout the shop, featuring a removable backboard and easy to handle sample pieces.



Sample Display Stand



PHONE: **1300 918 918** FAX: **+61 2 9644 3353** sales@everstone.com.au

SYDNEY

HEAD OFFICE

20 PRINCES ROAD EAST AUBURN NSW 2144 AUSTRALIA

MELBOURNE

168 DISCOVERY ROAD DANDENONG SOUTH VIC 3175 AUSTRALIA

BRISBANE

PHONE: 0418 886 833

WWW.EVERSTONE.COM.AU